

SET UP FOR PRO-ELITE REPAIR STAND

FEATURES

FIGURE 1



QUICK CLAMP

Patented Secure Lock clamp, features ratchet-action closing and push-button release.

TRUE PORTABILITY

Quickly folds for compact travel and storage. Weighs only 12.6 lbs.


MAXIMUM STABILITY

Stiff tripod design allows for wrenching on flat or uneven surfaces.

- A: Small Tri-Knob
- B: Clamp Jaws
- C: Quick-Release Button
- D: Clamp Arm
- E: Large Tri-Knob
- F: Telescoping Lock Lever
- G: Leg-Fitting Lock Lever
- H: Leg-Fitting
- I: Footcap

SET UP - UNFOLD THE STAND


FIGURE 2

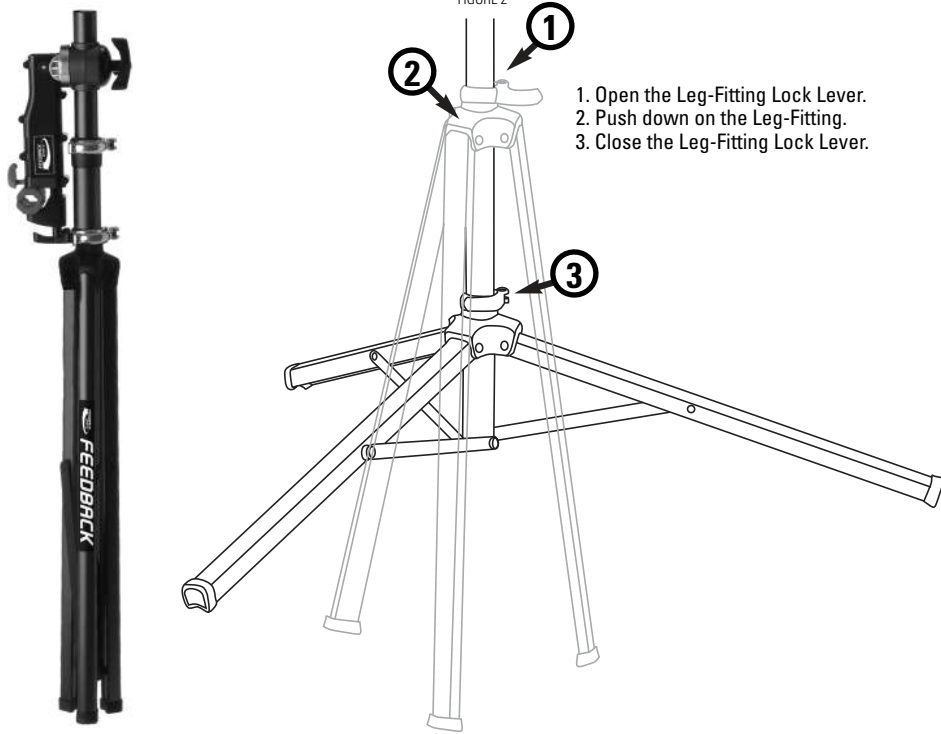

1. Open the Leg-Fitting Lock Lever.
2. Push down on the Leg-Fitting.
3. Close the Leg-Fitting Lock Lever.

SET UP - UNFOLD THE CLAMP HEAD

FIGURE 3

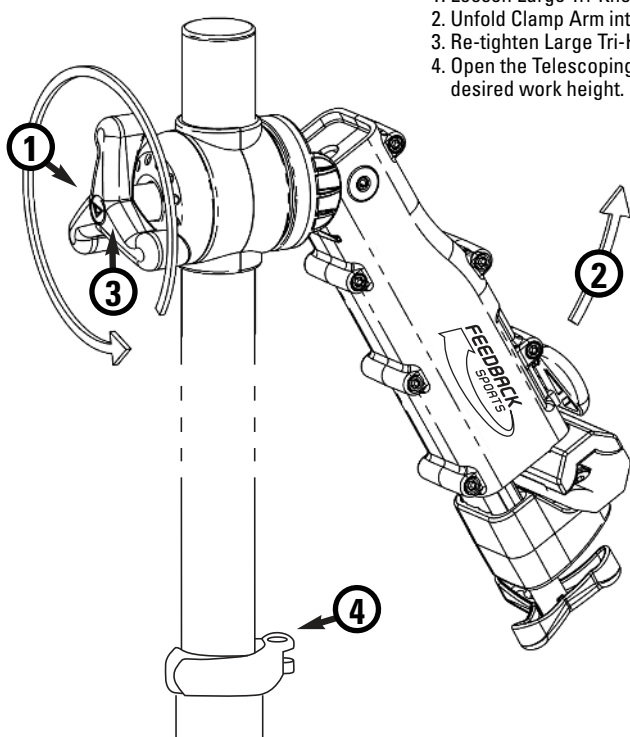


1. Loosen Large Tri-Knob.
2. Unfold Clamp Arm into a horizontal position.
3. Re-tighten Large Tri-Knob.
4. Open the Telescoping Lock-Lever and adjust to desired work height. Close Lock-Lever.

BICYCLE & THE STAND

PLACING BICYCLE IN THE STAND


1. Push Red Quick-Release button to open Clamp Jaws.
2. Lift and place seatpost into the Clamp against inner Jaw.
3. Push sliding Jaw closed.

FIGURE A

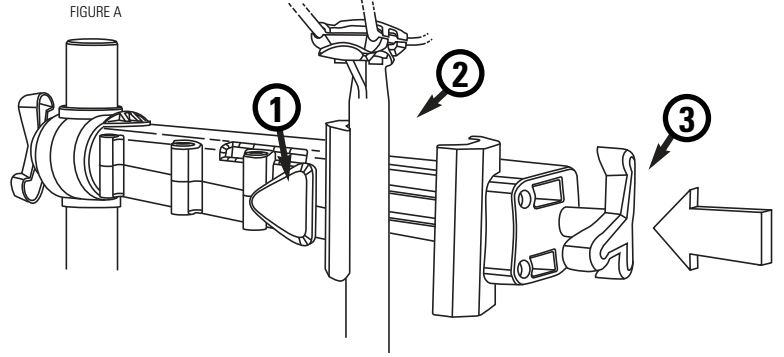


4. Twist Small Tri-knob to secure the bike, do not over tighten.

FIGURE B

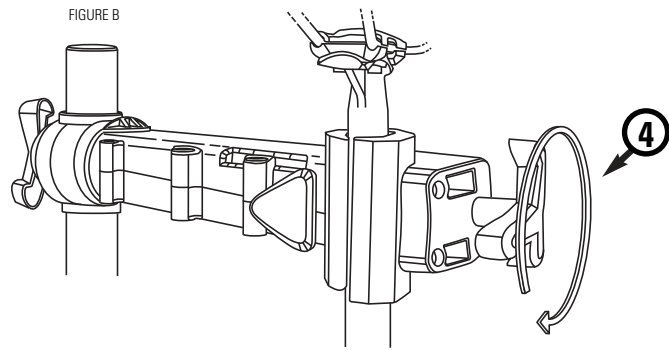

5. With bike in stand, loosen Large Tri-knob. Rotate bike to desired position. Securely tighten Large Tri-knob.

FIGURE C

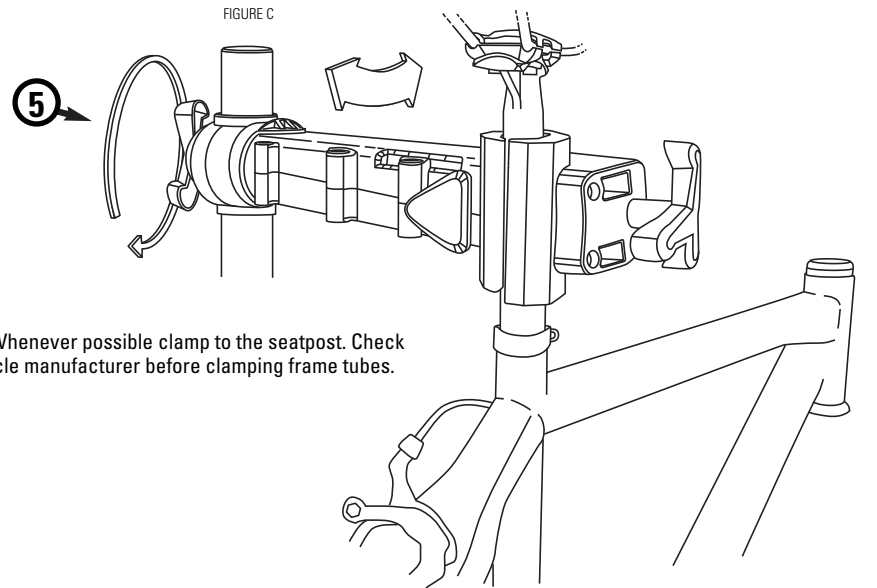


NOTE: Whenever possible clamp to the seatpost. Check with bicycle manufacturer before clamping frame tubes.

REMOVING BICYCLE FROM THE STAND

1. Securely hold bike & depress Red Quick-Release button.
2. Lift bicycle out of jaws.

FIGURE D

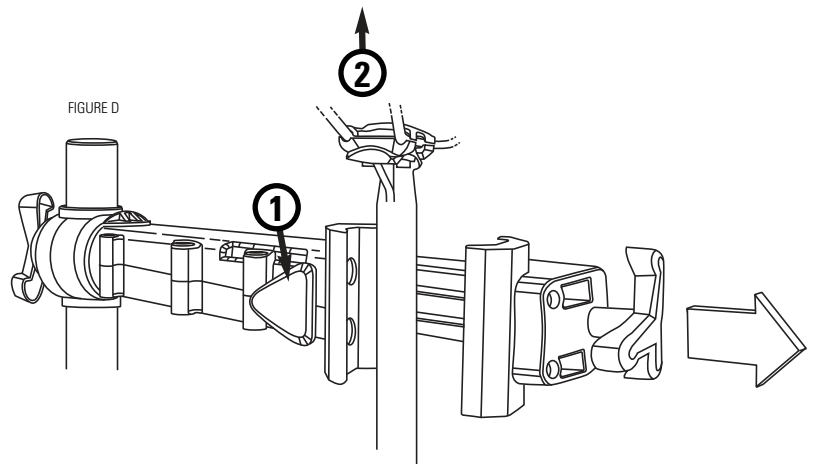

**FEEDBACK
SPORTS**

MAINTENANCE TIPS

> Maximum grip on the bicycle is achieved when the jaws are free from any oil or dirt. Small amounts of any oil, including hand oil, can cause the jaws to under perform. When needed, clean jaws with alcohol or detergent a damp cloth.